

## features

- Complies with EN54 part 2 and part 4
- 40 fire zone LED indicators
- 2 independent sounder circuits
- 500mA Loop Drivers
- 7 day timers
- Day/Night mode switching
- Onboard monitored inputs
- Programmable user function keys
- Event logging
- Onboard diagnostics
- User access restriction
- All metal enclosure
- Plug-in connectors
- Optional internal printer
- PC configuration software (optional)

The Dimension series of intelligent multi protocol fire alarm control panels from Morley-IAS Fire Systems have been developed based on two concepts - **simplicity and reliability**.

# DX4e

4 loop  
intelligent fire alarm  
control panel

# Data Sheet

We reserve the right to amend any design or specification in line with our policy of continuing development and improvement. © Morley-IAS Fire Systems 2004.

Simply, fix the control panel to the wall, connect the field wiring and everything else is configured in the software. Even programming the control panel is simple. No computer is required and it only takes a few key presses to have a working fire alarm system. First, set the panel to "AUTOLEARN" Second "RESET" the panel. The Control Panel is now protecting the building.

The Dimension series provides additional features allowing:- programmable text messages to identify the exact location of each field device, a class change input for schools, coincidence and verification detection (false alarm management), sensitivity adjustment (between day and night), programmable function buttons, input/output logic and extensive event logging. A feature rich fire alarm control panel constructed from high specification components to help both the installer and the end user.

The Dimension series is especially suited to offices, retail units, health centres, leisure facilities, cinemas and hotels to name but a few applications. A compact, high performance, economical fire alarm control panel for the protection of medium sized buildings.



Charles Avenue, Burgess Hill  
West Sussex, RH15 9UF  
United Kingdom


Tel: +44 (0) 1444 23 55 56  
Fax: +44 (0) 1444 25 44 10  
Email: [sales@morleyias.co.uk](mailto:sales@morleyias.co.uk)  
[www.morley-ias.co.uk](http://www.morley-ias.co.uk)

A Honeywell Company



# mechanical

|                               |                                  |
|-------------------------------|----------------------------------|
| Dimension (H x W x D) :       |                                  |
| DX4e-40L                      | 620 x 380 x 130 mm               |
| DX4e-40LP                     | 620 x 380 x 130 mm               |
| Weight (Excluding batteries): |                                  |
| DX4e-40L(F)                   | 9 Kg                             |
| DX4e-40LP(F)                  | 9.2 Kg                           |
| Material :                    | 1.2mm Zintec powder epoxy coated |
| Colour :                      | RAL 9001 - Cool Grey             |
| Knockouts :                   |                                  |
| Top:                          | 19 x M20                         |
| Bottom:                       | 3 x M20                          |
| Temperature                   |                                  |
| Operating :                   | 0°C to +45°C                     |
| Storage :                     | -10°C to +55°C                   |
| Relative humidity :           | 5% to 95% non-condensing         |

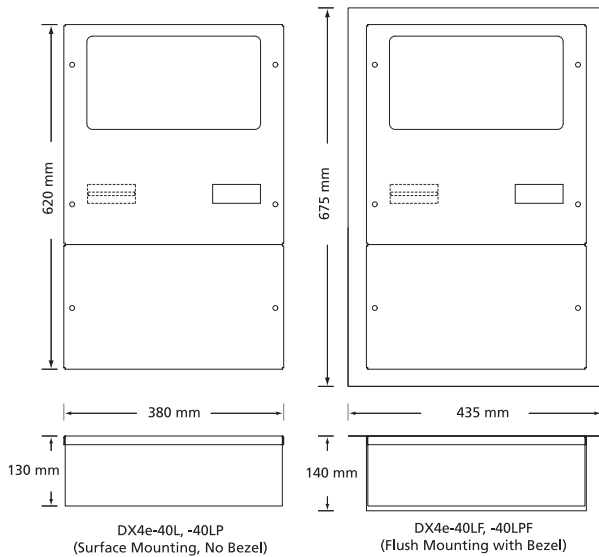

# user interface

|                     |  |
|---------------------|--|
| Display :           | 2 x 40 Character backlit Liquid Crystal  |
| Control keys :      | Sound Alarms, Silence/Resound, Mute, Buzzer, Accept, Reset.  |
| Programmable keys : | 2 independent programmable buttons and LED indicators.   |
| Programming keys:   | 12 button alpha numeric key pad and 4 cursor keys.   |
| Indicators :        | Fire, Fault, Test, Disablement, Delayed Mode, Alarms Silenced, Buzzer Muted, Sounders Disabled, Relays Disabled, Power Supply Fault, CPU Fault, Sounder Fault and Earth Fault. |
| Zonal :             | 40 Fire zones LED indicators.  |

# part numbers

|                |   |
|----------------|---|
| <b>705-028</b> | DX4e-40L-M 4 loop Fire Alarm Control Panel. Morley-IAS Protocol only.               |
| <b>705-029</b> | DX4e-40LP 4 loop Fire Alarm Control Panel with internal printer.                    |
| <b>705-018</b> | DX4e-40L-MF 4 loop Fire Alarm Control Panel. Flush mounting.                        |
| <b>705-019</b> | DX4e-40L-MPF 4 loop Fire Alarm Control Panel with internal printer. Flush mounting. |

# accessories

|                    |   |
|--------------------|---|
| <b>795-083</b>     | Keyswitch Kit   |
| <b>797-068</b>     | Bezel kit for DX4e-40L, -40LP                                   |
| <b>795-085</b>     | Internal Printer for DX series                                  |
| <b>070-010</b>     | Printer paper roll  |
| <b>709-601-001</b> | ZXr-A Active Repeater   |
| <b>709-701-001</b> | ZXr-P Passive Repeater  |
| <b>795-082</b>     | Engineers SPK (Software Programming Kit)                        |
| <b>795-080</b>     | PC Interface Lead for programming all Morley-IAS control panels |

**Note:** \* Maximum available current will be dependent on full control panel loading.

# electrical

|                      |  |
|----------------------|--|
| Operating Voltage :  | 230Vac (+10%, -15%) 50-60 Hz                                   |
| PSU Rating :         |  |
| DX4e-40L(F)          | 24 Vdc 4A  |
| DX4e-40LP(F)         | 24 Vdc 4A  |
| Stand-by Batteries : |  |
| DX4e-40L(F)          | 2 x 12Ahr or 2 x 17Ahr   |
| DX4e-40LP(F)         | 2 x 12Ahr or 2 x 17Ahr   |
| Auxiliary output*:   | +24 Vdc 250mA fused  |
| Loop Capacity*:      | 4 Loops, 500mA per loop  |
|                      | 198 devices per loop, Morley-IAS Protocol                      |
| Output Relays:       |  |
| Fire relay :         | Single pole changeover 30Vdc 1A                                |
| Fault relay :        | Single pole changeover 30Vdc 1A                                |
| Aux relay :          | Programmable single pole changeover 30Vdc 1A                   |
| Onboard Inputs:      |  |
| Keyswitch :          | programmable for select functions                              |
| Input #1 :           | programmable (monitored) for select functions                  |
| Input #2 :           | programmable (monitored) for select functions                  |
| Data Ports :         |  |
|                      | 1 x RS 485 (Repeater connections)                              |
|                      | 1 x RS232 (PC Programming)                                     |
| Sounder Circuits :   | 2 output circuits, 1A available across both sounder circuits.* |