



smartSINGLE is an elegant and compact 'Access and Time Attendance system. Supports Latest ICLASS Technology from HID. It can run on Standalone as well as network mode. The system is reliable, robust and easy to install with minimum support.

Key Features:


- Elegant and Compact Size.
- Card User Capacity from 2000 – 5000
- Event Buffers from 6000 – 20,000
- HID Compatible (HID PROX 125 KHz and HID iCLASS 13.56 Mhz Smart Card Technology)
- Can be configured in network mode
- User Friendly software with detailed attendance features available for LAN as well as Web-Enabled applications.
- LCD for Time & Attendance Display along with user defined LCD Messaging
- Highly secured, very convenient and reliable at a competitive price
- Dual Authentication Mode – PIN / Card / PIN + Card

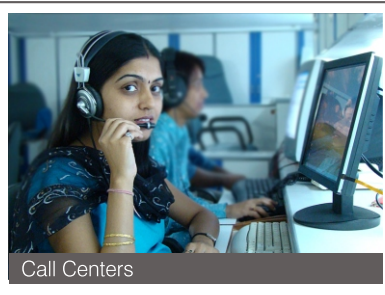


Call Centers

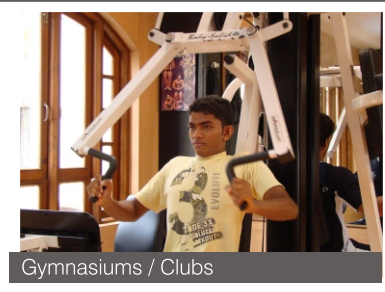


Gymnasiums / Clubs

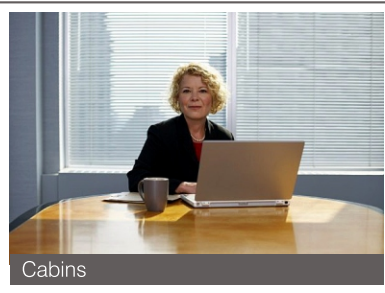

Cabins

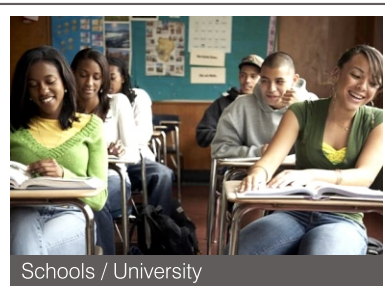

Schools / University

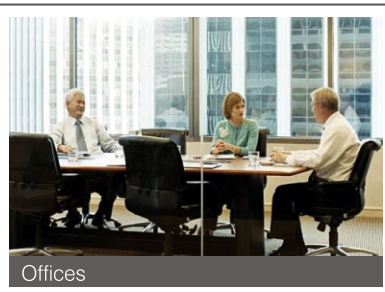

Offices



Specifications	ST2 Series	ST9 Series
Memory	128 KB	512 KB Flash
Read Range	Upto 10 cms	
Event Buffers	6000	20,000
Number of Users	2000	5,000
Operation Modes	Card Only, Card/UID Only, (UID/Card) + PIN, Card + PIN	
In-built Reads	HID (125 KHz) or HIDiCLASS(13.56 Mhz) Smart Card Technology	
External Reader Port	26/32/34/35 bit Wiegand	
Communication ports	RS485 / RS232	RS485 / TCP/IP
Baud rate	9600bps (Default)	
Facility Code	8 (3 digit code)	
Inputs/Outputs	2 I/p (Door Status, Egress), 2 O/p (DOTL, Lock)	
Time Zones / Access Levels	7 + 1 (Free Time Zone)/Unlimited	63 + 1 (Free Time Zone)/Unlimited
Anti - Passback	Local (Controller Wise)	
Controller ID	Upto 32	Upto 128
Input Points	1 Fire Input	
LCD	16 X 2 alphanumeric	
Keypad	12 Key Numeric	
Access/Remote Management System	SRMS10 – P, SRMS23 –PS	
Reporting / Attendance Software	Classic; Professional & Advance Edition	
LCD Messaging	User defined Local / Global / Banner	
LED/Buzzer	Bi-Color Bar/Multi Tone Buzzer o/p	

Specifications	ST2 Series	ST9 Series
Admin Users	8 Max	
Holiday Settings	42	
Power Supply	For Unit : 12VDC 1.2 A Max For Lock: 12 VDC 1.5 A Max (Isolated)	
Battery Backup Power Supply	Optional	
Temperature	0° C to 50° C	
Humidity	20 % to 90%	
Color	Jet Black	
Weight	400 gms	
Approvals	CE (under Process)	
Dimension (L X H X D) in mm	101 X 124 X 48	

Benefits:

- Easy to configure and install
- Supports HID readers: (HID PROX 125 KHz and HID iCLASS 13.56 Mhz Smart Card Technology)
- Products Range to support requirements from Small Office to Organizations with Multi-Locations.
- User-friendly Remote Management System
- Minimum support required

Software Features:

- User-friendly software GUI.
- Advanced Shift Management and Attendance Features
- Access Control Configuration (Doors, Time Zones, Door Open Time, DOTL etc.)
- Cater to the needs from Small offices & Single location to Multi-Company, Multi-location & Multi-Divisions.
- Payroll Interface for any payroll package.
- Various versions: smartSOFT™ Classic / Professional / Enterprise. (Visit www.smartisystems.com for more details)

Applications:

- Time Attendance System
- Physical Access Control
- Point of Sale System
- Customer Loyalty Programs
- Safes and Vaults

Under HID Connect Partner Program



*Specifications and features are subject to change without prior notice.

119, Neha Industrial Estate, Dattapada Road, Borivali (E), Mumbai - 400066
 Tel.: +91 22 4074 4444 / 2870 4141 Telefax: +91 22 4074 4455
 visit us at: www.smartisystems.com e-mail: enquiry@smartisystems.com

